



Warranty

Subject to operation at legal load and speed limits, correct tyre fitment and inflation pressure, RoadKing rims & wheels are fully guaranteed by Mullins Wheels Pty Ltd with a TWO YEAR Pro-rata Warranty against material failure or faulty workmanship (excluding finish), from date of sale. Any returns for claim must be freight prepaid to our store. This warranty is in lieu of all other warranties express or implied and in no event shall this warranty be deemed to cover consequential damages of any kind.



RoadKing

by mullins wheels

Product Guide
NEW EDITION



RoadKing

DISC WHEELS TUBE TYPE

SIZE	STUD HOLE	FINISH	PART NO.	TYPE	P.C.D.	BORE DIA.	** HDS	DISC THICKNESS
6.00 x 16	A	Black	715-165	2 Piece	6/222.25 J	164mm	135mm	10mm
7.50 x 20	A	Black	715-420	2 Piece	8/285 J	221mm	165mm	14mm
7.50 x 20	A	Black	715-435	2 Piece	10/285.75 AM	220mm	165mm	14mm
7.50 x 20	B	Black	715-445	2 Piece	10/335 ENG	281mm	165mm	14mm
7.50 x 20	C	Black	715-455	2 Piece	10/335 ISO	281mm	165mm	14mm
8.00 x 20	C	Black	715-512	2 Piece	10/335 ISO	281mm	174mm	15mm
8.00 x 20	B	Black	715-507	2 Piece	10/335 ENG	281mm	174mm	15mm
8.50 x 20	A	Black	715-602	2 Piece	10/285.75 AM	221mm	180mm	13mm
8.50 x 20	C	Black	715-604	2 Piece	10/335 ISO	281mm	180mm	16mm
8.50 x 20	C	Black	715-605	3 Piece HD	10/335 ISO	281mm	172mm	16mm
8.80 x 20	A	Black	715-618	2 Piece HD	10/285.75 AM	221mm	186mm	16mm
8.50 x 24	C	Black	715-655	2 Piece HD	10/335 ISO	281mm	185mm	16mm
10.0 x 20	C	Black	715-620	3 Piece HD	10/335 ISO	281mm	210mm	17mm

** HDS = Half Dual Spacing

RoadKing

DEMOUNTABLE RIMS TUBE TYPE

SIZE	FINISH	PART NO.	RIM STYLE	TYPE
7.50 x 20	Black	705-280	Demountable	3 Piece
10.0 x 20	Black	705-323	Demountable	3 Piece

RoadKing

NON DEMOUNTABLE RIMS TUBE TYPE

SIZE	FINISH	PART NO.	RIM STYLE	TYPE
5.50 x 15	Black	705-006	Non Demountable	2 Piece
6.00 x 16	Black	705-130	Non Demountable	2 Piece



Truck and Trailer Wheels and Rims



by mullins wheels



by mullins wheels

Contact your local branch now:

SOUTH AUSTRALIA
Ph (08) 8281 3555
sasales@mullins.com.au

VICTORIA
Ph (03) 9357 2333
vicsales@mullins.com.au

NEW SOUTH WALES
Ph (02) 9725 2555
nswsales@mullins.com.au

QUEENSLAND
Ph (07) 3277 8677
qldsales@mullins.com.au

WESTERN AUSTRALIA
Ph (08) 9277 6266
wasales@mullins.com.au

Scan QR code
for more info
on RoadKing



01/25





RoadKing DEMOUNTABLE RIMS TUBELESS

SIZE	OFFSET	FINISH	PART NO.	RIM TYPE	VALVE
6.00 x 17.5	93mm	Silver	700-295	Demountable	405-725
6.75 x 17.5	100mm	Silver	700-305	Demountable	405-725
8.25 x 22.5	118mm	Silver	700-420	Demountable	405-728
9.00 x 22.5	Reverse Steer 73mm	Silver	700-465	Demountable	405-726
		Silver	700-475	Demountable	405-728
11.75 x 22.5	Dual banded	Standard 100 Spacing	700-725	Demountable	405-727
			700-730	Demountable	405-727
			700-755	Demountable	405-727
			700-735	Demountable	405-727
			700-765	Demountable	405-727
			700-740	Demountable	405-727
			700-745	Demountable	405-727
			700-760	Demountable	Excluded
14.00 x 22.5	Dual banded	Standard 100 Spacing	700-605	Demountable	405-727
			700-610	Demountable	405-727
			700-625	Demountable	405-727
			700-615	Demountable	405-727
			700-620	Demountable	405-727
			700-600	Demountable	Excluded
20.00 x 22.5	Dual banded	Standard 100 Spacing	700-910	Demountable	Excluded

Other Sizes Available By Special Order.



RoadKing SPACER BANDS

SIZE	FINISH	PART NO.	TYPE	SIZE	FINISH	PART NO.	TYPE
15 x 4.00	Silver	720-1540CH	Channel	20 x 4.25	Silver	720-2042CC	Corrugated
20 x 3.625	Silver	720-2035CC	Corrugated	20 x 4.50	Silver	720-2045CH	Channel
20 x 4.00	Silver	720-2040CC	Corrugated				



by mullins wheels



RoadKing FORGED ALLOY WHEELS

SIZE	FINISH	PART NO.	P.C.D.	STUD HOLE	BORE DIA.	** HDS	DISC THICKNESS	WEIGHT KG.	VALVE
7.50 x 19.5	Machined	716-97508275IMA	8/275	24mm ISO	221mm	155mm	21mm	17.2KG	Included
7.50 x 19.5	Brilliant Finish	716-97508275IBF	8/275	24mm ISO	221mm	155mm	21mm	17.2KG	Included
8.25 x 22.5	Machined	716-28210285IMA	10/285.75	26mm ISO	220mm	168mm	25mm	23.7KG	Included
8.25 x 22.5	Brilliant Finish	716-28210285IBF	10/285.75	26mm ISO	220mm	168mm	25mm	23.7KG	Included
8.25 x 22.5	Nanotech Both Sides	716-28210285INT	10/285.75	26mm ISO	220mm	168mm	25mm	23.7KG	Included
8.25 x 22.5	Nanotech Inside	716-28210285INTD	10/285.75	26mm ISO	220mm	168mm	25mm	23.7KG	Included
8.25 x 22.5	Nanotech Outside	716-28210285INTS	10/285.75	26mm ISO	220mm	168mm	25mm	23.7KG	Included
8.25 x 22.5	Machined	716-28210335IMA	10/335	26mm ISO	281mm	168mm	25mm	25.5KG	Included
8.25 x 22.5	Brilliant Finish	716-28210335IBF	10/335	26mm ISO	281mm	168mm	25mm	25.5KG	Included
8.25 x 22.5	Machined	716-28210335RMA	10/335	32mm RETRO*	281mm	168mm	25mm	25.4KG	Included
8.25 x 22.5	Brilliant Finish	716-28210335RBF	10/335	32mm RETRO*	281mm	168mm	25mm	25.4KG	Included
9.00 x 22.5	Polished Outside	716-29010285IPO	10/285.75	26mm ISO	220mm	Steer 80 Offset	27mm	25.7KG	Included
11.75 x 22.5	Polished Outside	716-21110285IPO	10/285.75	26mm ISO	220mm	Steer 120 Offset	26mm	26.4KG	Included
11.75 x 22.5	Polished Outside	716-21110335IPO	10/335	26mm ISO	281mm	Steer 120 Offset	26mm	25.8KG	Included
11.75 x 22.5	Polished Outside	716-21110335RPO	10/335	32mm RETRO*	281mm	Steer 120 Offset	26mm	25.8KG	Included

* Retro Fit Nuts Are Available To Suit Single or Dual Wheel Applications


** HDS = Half Dual Spacing

RoadKing RETRO FIT NUTS


FINISH	PART NO.	DESCRIPTION
Black	725-980	Front Short - M22x1.5 - Right Hand Thread
Black	725-981	Rear Long - M22x1.5 - Right Hand Thread
Black	725-980L	Front Short - M22x1.5 - Left Hand Thread
Black	725-981L	Rear Long - M22x1.5 - Left Hand Thread
Black	725-988	Rear Long - M18x1.5 - Right Hand Thread
Zinc	725-974	Rear Long - M22x1.5 - Left Hand Thread



DUAL DEMOUNTABLE RIMS

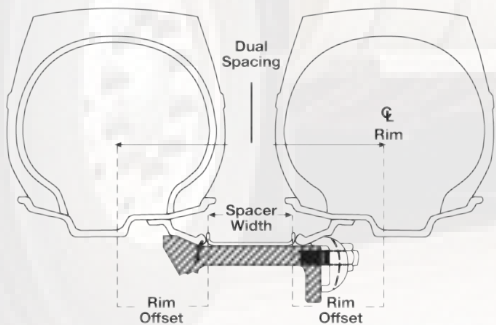

DUAL DISC WHEELS

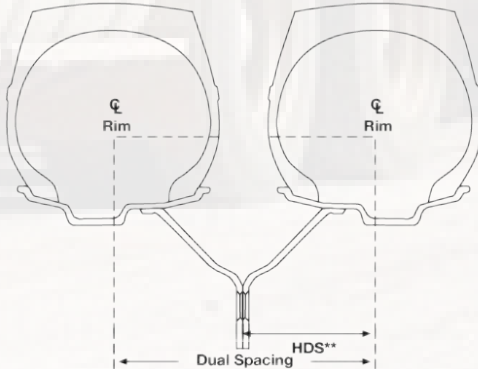


RoadKing DISC WHEELS TUBELESS


SIZE	STUD HOLE	FINISH	PART NO.	P.C.D.	BORE DIA.	** HDS	DISC THICKNESS	VALVE
5.50K x 16.0	A	Silver	710-180	5/208 J	150mm	116mm	9.5mm	405-727
5.50K x 16.0	A	Silver	710-185	5/203.2 J	146mm	116mm	9.5mm	405-727
5.50K x 16.0	A	Silver	710-175	6/222.25 J	164mm	125mm	9.5mm	405-727
6.00 x 17.5	A	Silver	710-208	5/203.2 J	146mm	127mm	10mm	405-727
6.00 x 17.5	A	Silver	710-205	5/208 J	150mm	127mm	10mm	405-727
6.00 x 17.5	A	Silver	710-202	6/222.25 J	164mm	135mm	11mm	405-727
6.00 x 17.5	C	Silver	710-210	10/225 ISO	176mm	135mm	11mm	405-727
6.75 x 17.5	A	Silver	710-215	6/222.25 J	164mm	140mm	12mm	405-727
6.75 x 17.5	C	Silver	710-220	10/225 ISO	176mm	145mm	12mm	405-727
6.75 x 19.5	A	Silver	710-225	6/222.25 J	164mm	145mm	12mm	405-727
6.75 x 19.5	E	Silver	710-230	8/275 ISO	221mm	140mm	11.75mm	405-727
7.50 x 19.5	C	Silver	710-240	8/275 ISO	221mm	155mm	13mm	405-727
8.25 x 19.5	C	Silver	710-250	8/275 ISO	221mm	165mm	14mm	405-727
7.50 x 22.5	D	Silver	710-326	8/275 DIN	221mm	160mm	14mm	405-727
7.50 x 22.5	A	Silver	710-329	8/285 J	221mm	165mm	13mm	405-727
7.50 x 22.5	C	Silver	710-335	10/285.75 ISO	220mm	165mm	13mm	405-727
7.50 x 22.5	C	Silver	710-340	10/335 ISO	281mm	165mm	13mm	405-727
8.25 x 22.5	A	Silver	710-445	8/285 J	221mm	165mm	14mm	405-727
8.25 x 22.5	C	Silver	710-447	10/285.75 ISO	220mm	165mm	14mm	405-727
8.25 x 22.5	A	Silver	710-450	10/285.75 AM	220mm	165mm	14mm	405-727
8.25 x 22.5	C	Silver	710-460	10/335 ISO	281mm	165mm	14mm	405-727
8.25 x 22.5	B	Silver	710-455	10/335 ENG	281mm	165mm	14mm	405-727
8.25 x 22.5	D	Silver	710-465	10/335 DIN	281mm	165mm	14mm	405-727
9.00 x 22.5	C	Silver	710-500	10/335 ISO	281mm	175mm	14mm	405-727
9.00 x 22.5	C	Silver	710-502XHD	10/335 ISO	281mm	175mm	15mm	405-727
9.00 x 22.5	B	Silver	710-510	10/335 ENG	281mm	175mm	14mm	405-727
11.75 x 22.5	A	Silver	710-545	8/285 J	221mm	100mm	14mm	405-727
11.75 x 22.5	C	Silver	710-547	10/285.75 ISO	221mm	120mm	14mm	405-727
11.75 x 22.5	C	Silver	710-560	10/335 ISO	281mm	120mm	14mm	405-727
20.00 x 22.5	C	Silver	710-660	10/335 ISO	281mm	0mm	10mm	405-728

** HDS = Half Dual Spacing


RoadKing WHEEL STUD HOLE TYPES

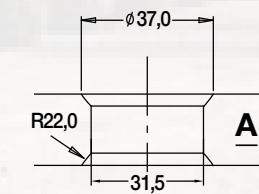


American/Japanese R22 Ball Taper for Double Cap Nut




English 80° Countersink



ISO No Countersink for Two-Piece Flange Nut



DIN R18 Ball Taper for Nut and Washer

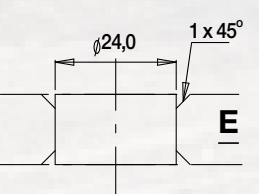

ISO No Countersink for Two-Piece Flange Nut

Any Truck Every Wheel

www.mullinswheels.com.au